



GTZZ16Z-16m Diesel articulated boom lift

Model	GTZZ-16Z
Working Height Maximum	18m
Platform Height Maximum	16m
Working radius maximum	9.8m
Lift capacity	230kg
Crossing height maximum	7.75m
Length(stowed) ①	7.7m
Width (stowed) ②	2.28m
Height(stowed) ③	2.38m
Wheel base ④	2.4m
Ground clearance ⑤	430mm
Platform measurement ⑥*⑦	1.83*0.76m
Tuning radius (inside)	2.61m
Tuning radius (outside)	5.61m
Travel speed(stowed)	6.3km/h(2WD) 4.2km/h(4WD)
Travel speed(raised or extended)	1.1km/h
Grade ability	45% (4WD)
Solid tire	33*12-20
Swing speed	0-0.8rpm
Turn table swing	360 Continuous
Platform leveling	Automatic leveling
Platform rotation	±90
Fuel tank volume	100L
Total weight	7877kg(4WD)
Control voltage	12V
Drive &Steering mode	4*4*2
Engine	Cummins (42kw/2200rpm) Yanmar(35.5kw/2200rpm)

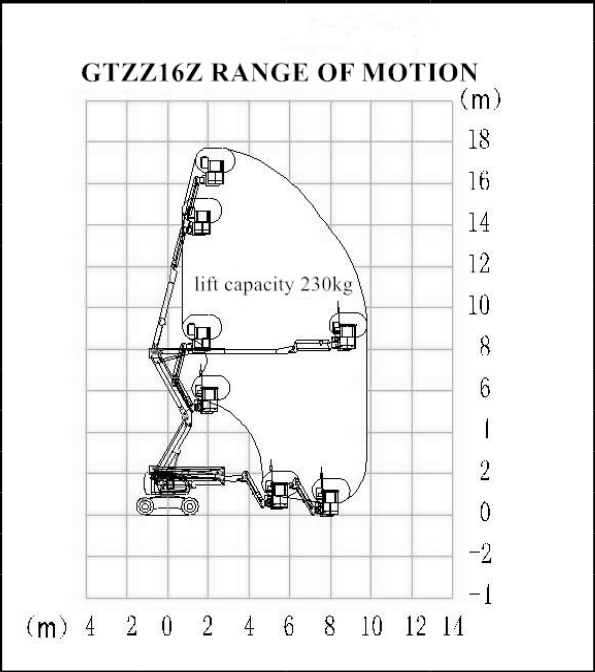

CONFIGURATION	
Engine	Yanmar (Japan) ; Cummins (USA) ;
Variable pump	Rexroth (Germany) SAUER (USA)
Gear pump	SALAMI (Italy)
Travel motor	Rexroth (Germany) SAUER (USA)
Travel reducer	Rexroth (Germany) OMONI (USA) PMP (Italy)
Hydraulic valve	Hydraforce (USA) Northman (China)
Rotary motor:	HELAC (USA)/Whlionshare(China)

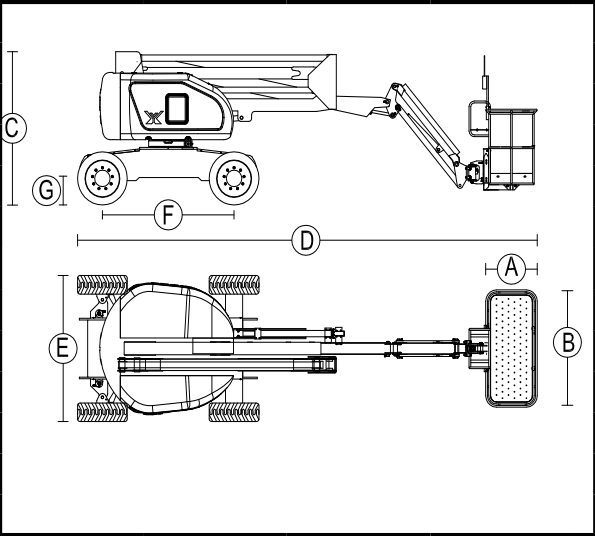