


GTBZ56Z-56m Diesel telescopic boom lift

| | |
|---|---------------------|
| Model | GTBZ56Z |
| Working Height Maximum | 58m |
| Platform Height Maximum | 56m |
| Working radius maximum | 26m |
| Lift capacity(restricted) | 480kg |
| Lift capacity(non-restricted) | 230kg |
| Length(stowed) ① | 14.9m |
| Width (axle retracted) | 2.49m |
| Width (axle extended) ② | 5.1m |
| Height(stowed) ③ | 3.15m |
| Wheel base ④ | 5.6m |
| Ground clearance ⑤ | 380mm |
| Platform measurement ⑥*⑦ | 2.44*0.91m |
| Turning radius(inside,axle,retracted) | 7.6m |
| Turning radius(inside,axle,extended) | 2.69m |
| Turning radius(outside, axle,retracted) | 10m |
| Turning radius(outside, axle,extended) | 7.07m |
| Travel speed(stowed) | 4.4km/h |
| Travel speed(raised or extended) | 1.1km/h |
| Grade ability-Stowed | 40% |
| Solid tire | 445/65-22.5 |
| Swing speed | 0~1/3rpm |
| Turn table swing | 360 Continuous |
| Platform leveling | Automatic leveling |
| Platform rotation | ±90° |
| Hydraulic tank volume | 200L |
| Total weight | 27500kg (4WD) |
| Control voltage | 24v |
| Drive &Steering mode | 4*4*4 |
| Engine | Cummins |
| Rated power | Cummins QSB3.9-C100 |

| CONFIGURATION | |
|-----------------|-----------------------------|
| Engine | Cummins (USA) |
| Variable pump | SAUER (USA) |
| Lifting pump | Cassapa(Italy) |
| Travel motor | SAUER(USA) |
| Travel reducer | PMP(Italy)/Infinity(China) |
| Hydraulic valve | Hydraforce(USA) SANT(China) |
| Swing motor | Whlionshare(China) |

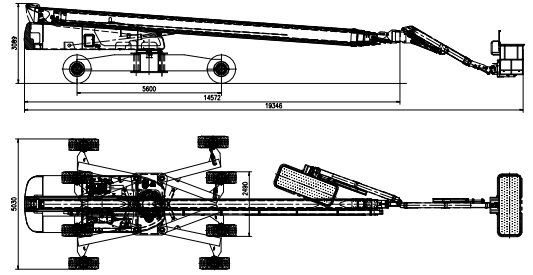

Range of Motion

