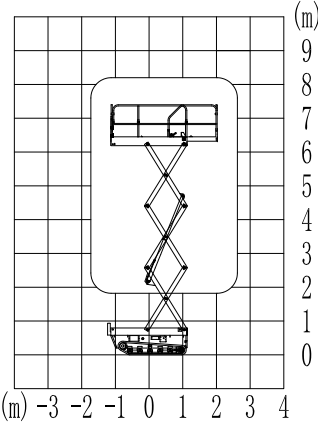
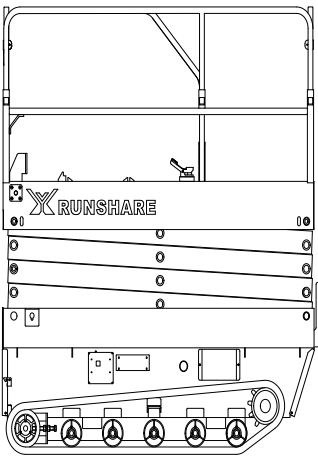


No.	Item	GTJZ06T	
1	Working height max. m	8.2	
2	Platform height max. m	6.2	
3	Lift capacity max. kg	450/120	
4	Length m	2.36	
5	Width m	1.26	
6	Height (stowed) m	2.24	
7	Height (stowed & folding guardrails) m	1.69	
8	Platform height min. m	1.2	
9	Platform dimensions (L×W) m	2.26×1.15	
10	Length extension deck m	0.9	
11	Ground clearance m	0.2	
12	Turning radius min. m	0	
13	Drive speed stowed km/h	2	
14	Drive speed raised km/h	0.8	
15	Working slop max.	1.5° /3°	
16	Gradeability	25%	
17	Lifting motor V/kw	24/1.6	
18	battery V/Ah	6×6/225	
19	charger V/A	36/20-35	

二、main configuration

Item	Origin	Brand
Power unit	China	Guorui
Charger	China	Longsheng
Control system	China	Canplus
Angle sensor	China	Sensapa
Hour meter	USA/SWISS	Curtis/Honeywell
Pressure sensor	China	Sensapa
Drive motor	China	Demake
Hydraulic valve	China	SANT